



RECOMMENDED MINIMUM CLEARANCE FOR ACCESS

0.75-14 NPT REDUCING BUSHING (SUPPLIED)

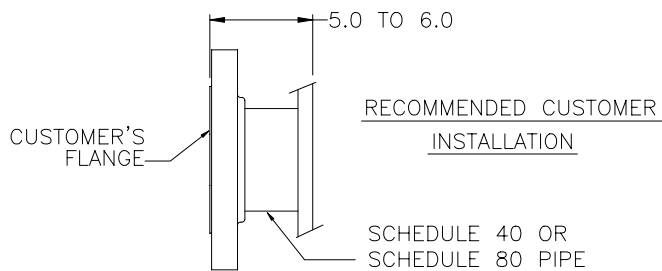

NOTES:

- 1 FLANGE IS 3 INCH, 316L STAINLESS RAISED FACE ANSI 900
- 2 RECOMMEND CUSTOMER INSTALL FLANGE FROM 5.0 TO 6.0 INCHES FROM VESSEL INTERNAL WALL. (NOTE UNIT LENGTH)
- 3 WEIGHT: 50 LBS
- 4 ALL DIMENSIONS GIVEN IN INCHES

 <b>PHASE DYNAMICS, INC</b> RICHARDSON, TEXAS		TITLE	
		INSTALLATION, 3" 900# INSERTION TEMP PROBE, 6 INCH CAGE	
SIZE	DWG NO.	DATE	
B	0070-00133-000	10/23/98	
REV	© PHASE DYNAMICS, INC.		